




E-mail: distributor@hyggeraquarium.com

Website: www.hyggeraquarium.com




HG073 USER MANUAL

hygger external aquarium LCD display thermometer

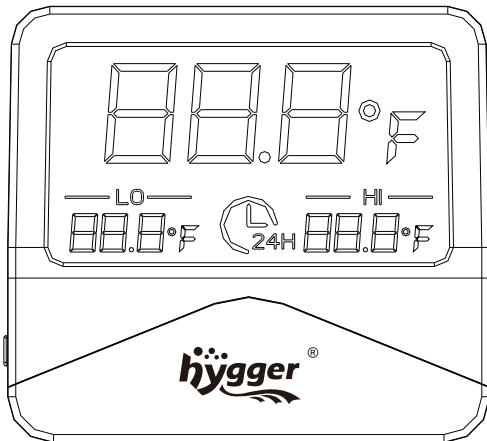


HG073-S

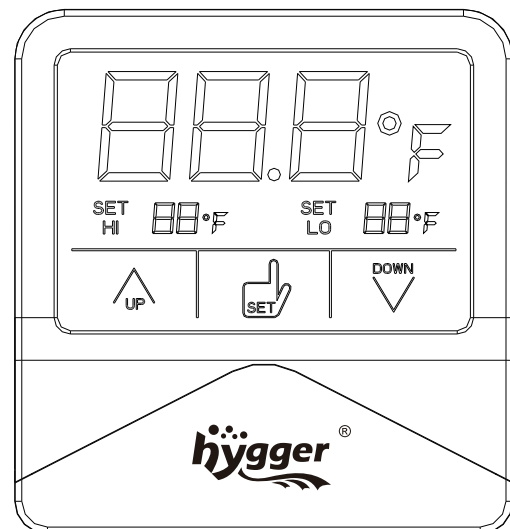


HG073-L

PRODUCT DIAGRAM

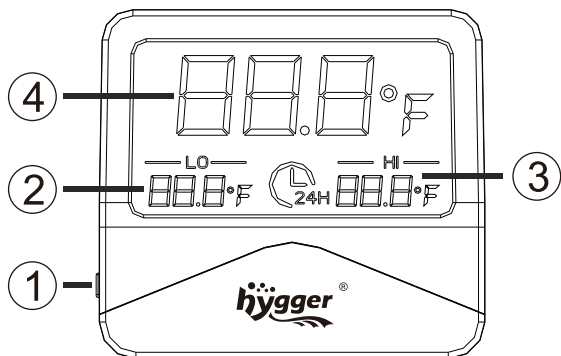

HG073-S

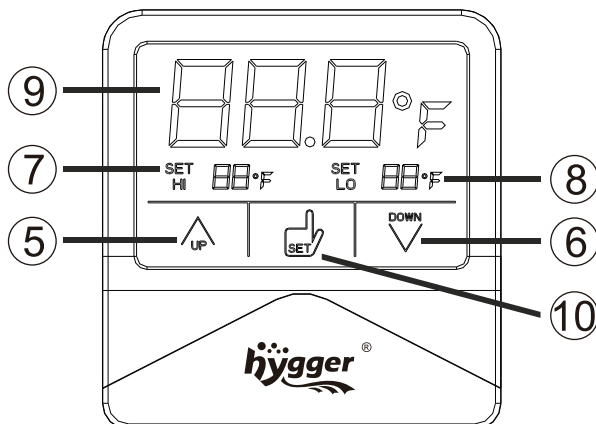

HG073-L

- ① Button: Press once switch between °C/°F
- ② Low temp within 24 hour
- ③ High temp within 24 hour
- ④ Current temp
- ⑤ UP button: "+" adjust temperature
- ⑥ DOWN button: "-" adjust temperature
- ⑦ SET HI temp: Set high temperature
- ⑧ SET LO temp: Set low temperature
- ⑨ Current temp: The display number will flash when the temp out of the preset range

- ⑩ SET button:(1) Press once switch between °C/°F;(2)press SET  button 5s, the digital SET HI will flash , then press UP button to set the max temperature. Press the SET button to save. (max temp set range 0°C~37°C/32°F~98°F);Then the digital SET LO will flash , press DOWN button to set the min temperature. Press the SET button to save or wait 5s for automatic confirmation. (min temp set range 0°C~36°C/32°F~97°F)

PRODUCT FEATURES:

- 1.Temp measurement range: 0°C~60°C (32°F~140°F)
- 2.Temp measurement deviation: $\pm 0.5^{\circ}\text{C}$ ($\pm 0.5^{\circ}\text{F}$)
- 3.Temp accuracy: 0.1°C(0.1°F)
- 4.Power supply: 3V CR1625*1 (HG073-S) 3V CR2032*1 (HG073-L)
- 5.External use on fish tank for saltwater and freshwater/reptiles & amphibians aquariums
- 6.Aluminum alloy sensor and cordless & touch screen design
- 7.Comes with a spare battery
- 8.Recommended replacement of battery half years
- 9.If temp < 0°C, LCD screen will display "LL" and flash; if temp > 60°C LCD screen will display "HH" and flash

ATTENTION PLEASE!

- It is not recommended to use the product in extreme conditions. Otherwise, the internal components of the product may be damaged and cannot be reused after battery replacement.
- Recommended replace the battery once find the screen is not clean.

-It is not recommended that the temperature difference between high and low temperatures be small. Otherwise, the screen flickers frequently, which results in fast battery consumption.

USE INSTRUCTIONS:

- 1.Product do not immerse the water, it's not water proof.
- 2.Remove the front cover and take out the insulation sheet for first time use or insert the battery into the battery compartment when place the battery. (refer to FIG1)
- 3.Please tear off the 3M adhesive tape and stick the thermometer on the outside of fish tank where it can detect the water temperature. (FIG2~FIG4)
- 4.Please be sure the fish tank has good water circulation to keep the thermometer is correct.




FIG1




FIG2




FIG3

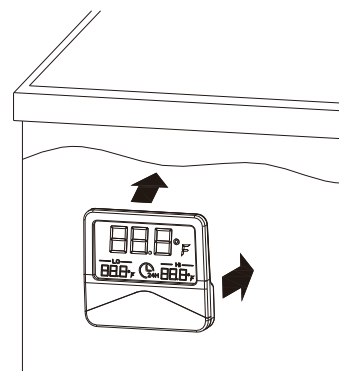


FIG4

PACKAGE INCLUDED:

1x thermometer

2x button battery (1 installed; 1 spare)

1x user manual

CONTACT INFORMATION:

Distributed by: Hygger Aquarium, Inc.
Chino, CA 91710

E-mail: distributor@hyggeraquarium.com

Website: www.hyggeraquarium.com

Trademarks of Shenzhen Mago Trading Co., Ltd
Bantian Group Business Center, Longgang,
Shenzhen City, China
All Rights Reserved

Made in China